



LayTile QS

Thinset Dry-Tile Adhesive Quick Setting

PRODUCT DESCRIPTION: LayTile QS is a special compound used as an adhesive for quick setting of ceramic tiles. It is suitable for use over a variety of surfaces including masonry, concrete, gypsum board, concrete backer board, mortar bed, brick, ceramic tiles and marble.

USES: Used on walls and floors to install glazed wall tiles, marble, ceramic mosaics, quarry tile, pavers, bricks, etc. whenever a low cost thin-set mortar installation is required.

ADVANTAGES: LayTile QS used in one layer, as thin as 2-3 mm after tiles are beat in; It has excellent impact resistance; and is water cleanable; non-flammable; and do not require soaking of tiles.

LIMITATIONS: Do not use for exterior surfaces or over metal, wood, or glass backings. Suitable only for dry areas.

COMPOSITIONS AND MATERIALS: Special formulation of hydraulic binder, graded quartz silica, water retentive additives and other compatible modifiers.

PACKAGING: Packaged in 20 Kg. and 8 Kg. moisture resistant, multi-wall paper bags.

COLORS: White or gray.

APPLICABLE STANDARDS: LayTile QS meets or exceeds standards of ANSI A108.5-1992, ANSI A118.1 and CTI-64.

TECHNICAL DATA: LayTile QS does not require the use of primer or surface conditioner; performs equally well on porous and non-porous surfaces, for use with vitreous or non-vitreous tiles. LayTile QS is non-staining and water washable.

Performance Characteristics

	Results
Initial Set	20 minutes
Final Set	1 hr
Bond Strength Comparison (28-Day Cure)	
Bond Strength to Glazed Wall Tile	600 psi
Bond Strength to Ceramic Mosaics	300
Bond Strength to Quarry Tile	400

Coverage Chart (using 3x3mm square notched trowel)



Type of Tile Coverage	(Square meters / 20 Kg. Bag)
10x10 cm Square wall tiles on smooth walls	9-12
10x10 cm Square wall tiles on block walls	8-9
Quarry tiles, pavers, bricks	5.5-6
Ceramic mosaics	10-12
Large decorative tiles, marble, brick, etc.	5-6

INSTALLATION: For proper performance tile must be set in accordance with ANSI A108.5-1992 specifications and with the Tile Council of America's "Handbook For Ceramic Tile Installations".

Surface Preparation: All surfaces must be clean and free of dust, grease, sealants and foreign matter.

Mixing: Mix 20 kg bag of LayTile QS with 4 liters of water to a smooth, workable consistency.

Application: Apply with conventional tile setter's notched trowel. Size of notches to be determined by installer since it is dependent upon conditions of substrate and characteristics of tile specified.

Precautions: Portland cement is an irritant. Avoid contact with skin. In case of contact wash thoroughly with water. For eyes, get medical attention. Keep out of reach of children.


Cleaning: Wash with water.

Storage Life: One year if stored in cool, dry location. Do not expose to moisture. Close partially used bags tightly.

MAINTENANCE: LayTile QS is maintenance-free and permanent. If damaged, it may be mechanically removed and re-applied.

Floor Installation:


Illustration 1.1

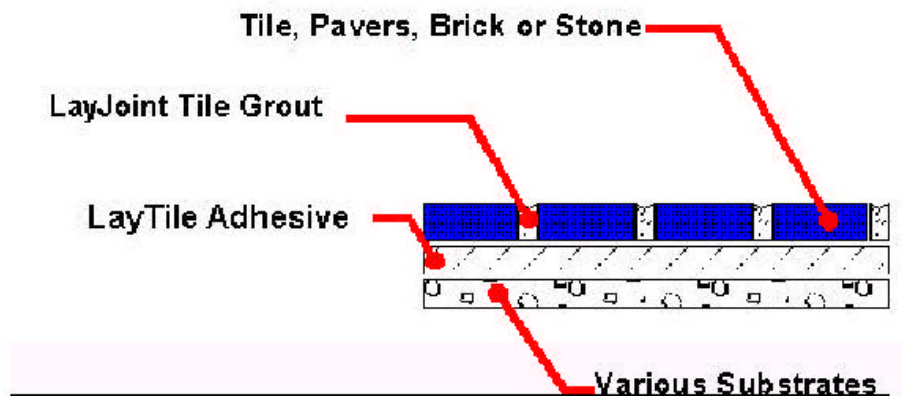



Installation on Vertical Surfaces:

Illustration 1.2

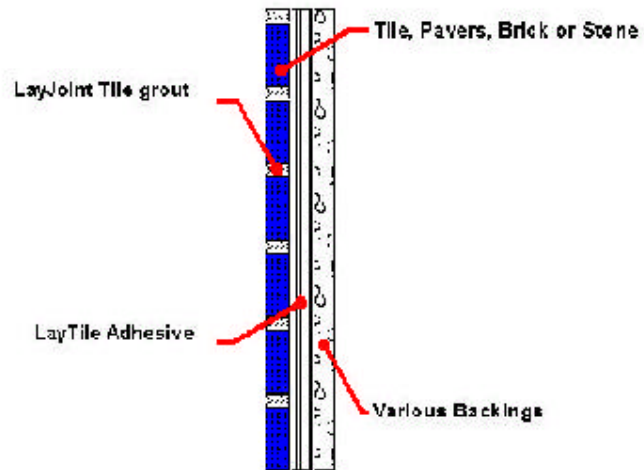

*Email: laymaster@laymaster.net
All material is Copyright Lay Master Inc. and may not be reproduced without written permission
Specifications subject to change without notice.
Ver. 1/2003*