



# LayDelay GP

## Gypsum Retarder

**PRODUCT DESCRIPTION:** LayDelay GP is a powder chemical admixture that delays the setting time of Gypsum based mortar and plaster. It is manufactured under rigid control that provides uniform, predictable performance. It is added to the dry mix before water.

**USES:** LayDelay GP is used in Gypsum raw material and installation or decorative Gypsum mortar and plaster when the initial setting time needs to be delayed due to job requirements.


**LIMITATIONS:** Cannot be used with Portland Cement.

**COMPOSITIONS AND MATERIALS:** is a proprietary based powder.

**PACKAGING:** Packed in 20 kg bags.

**TECHNICAL DATA:** As a retarder, LayDelay GP delays the setting of the Gypsum to extend pot life or allow longer setting and smoothing time

**Dose:** Two hours setting delay is obtained by using addition rates of 100 grams of LayDelay GP per 100 kg of Gypsum. The graph below shows the relation between dosage and setting time:

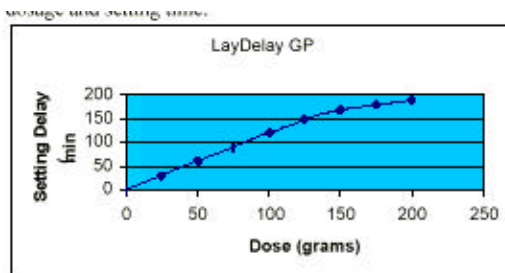

**Addition:** Add to the dry gypsum mix before water.

**Precautions:** This product is a mild irritant. Avoid contact with skin. In case of contact, wash thoroughly with water. For eyes, get medical attention. Keep out of reach of children. It is non-flammable.

**Cleaning:** In case of spill collect with broom.

**Storage Life:** One year if stored in cool location. Close partially used containers tightly.

*Email: [laymaster@laymaster.net](mailto:laymaster@laymaster.net)*

*All material is Copyright Lay Master Inc. and may not be reproduced without written permission. Specifications subject to change without notice.*

*Ver. 1/2004*